

Code	Height H (mm)	Length L (mm)	Tappings centre l (mm)	Width	Num. of tubes	Output Δt 50°C 75/65-20 (W)	Output Δt 40°C 70/50-20 (W)	Output Δt 30°C 55/45-20 (W)	Exp. n	Empty weight (kg)	Water content (l)
OPDRxxy89060800	600	605	550	49	8	426	319	220	1,355	11,2	2,6
OPDRxxy89061000	600	755	550	49	10	533	399	275	1,355	14,0	3,2
OPDRxxy89061200	600	905	550	49	12	640	479	330	1,355	16,8	3,8
OPDRxxy89061400	600	1050	550	49	14	746	559	385	1,355	19,6	4,5
OPDRxxy89061600	600	1205	550	49	16	853	638	440	1,355	22,4	5,1
OPDRxxy89061800	600	1355	550	49	18	959	718	495	1,355	25,2	5,8
OPDRxxy89080800	800	605	750	49	8	561	420	290	1,349	14,4	3,2
OPDRxxy89081000	800	755	750	49	10	701	526	362	1,349	18,0	4,0
OPDRxxy89081200	800	905	750	49	12	841	631	435	1,35	21,6	4,8
OPDRxxy89081400	800	1050	750	49	14	981	736	507	1,35	25,2	5,6
OPDRxxy89081600	800	1205	750	49	16	1122	841	579	1,35	28,8	6,4
OPDRxxy89100400	1000	305	950	49	4	347	260	179	1,34	8,4	1,9
OPDRxxy89100600	1000	455	950	49	6	521	390	269	1,34	12,6	2,9
OPDRxxy89100800	1000	605	950	49	8	694	520	358	1,34	16,8	3,8
OPDRxxy89101000	1000	755	950	49	10	868	650	448	1,34	21,0	4,8
OPDRxxy89180400	1740	305	1690	49	4	604	453	313	1,35	14,4	3,2
OPDRxxy89180600	1740	455	1690	49	6	906	680	469	1,35	21,6	4,8
OPDRxxy89180800	1740	605	1690	49	8	1208	906	625	1,35	28,8	6,4
OPDRxxy89181000	1740	755	1690	49	10	1510	1133	782	1,35	36,0	8,0
OPDRxxy89200400	2000	305	1950	49	4	668	500	345	1,36	16,0	3,5
OPDRxxy89200600	2000	455	1950	49	6	1002	750	518	1,36	24,0	5,3
OPDRxxy89200800	2000	605	1950	49	8	1336	1000	690	1,36	32,0	7,0
OPDRxxy89201000	2000	755	1950	49	10	1670	1250	863	1,36	40,0	8,8
OPDRxxy89201200	2000	905	1950	49	12	2004	1501	1036	1,36	48,0	10,6

x = 0 : white / x = 9 : coloured

Codes - choice of the connections (standard, central)

Example:

OPDRRM089081200 = Mirò 10 vertical H800, 905, standard connections, white
OPDRRC989081200 = Mirò 10 vertical H800, 905, central connections, coloured

xx = RM >> Standard connection


xx = RC >> Central connection TC 50 mm

see Mirò instructions
at the end of the Design Radiators section

colour: RAL 1019

Technical characteristics

- Flat tubes 70x11 mm
- Round collectors $\varnothing 38$ mm
- Pipes distance 5 mm
- Max working pressure = 4 bar
- Test pressure = 6 bar
- Max working temperature = 110°C
- For NF certification, see www.certita.fr

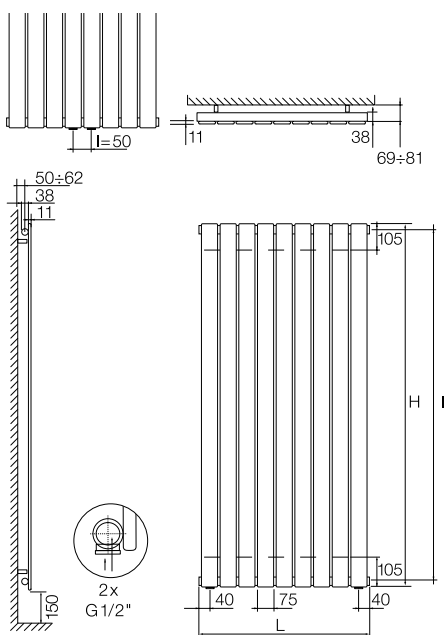

Standard equipment

- 6 x 1/2" connections, internal thread (four connections at the ends of the horizontal tubes, two perpendicular connections on the horizontal tubes); the distance between tappings centre of the two perpendicular connections is Length - 80 mm
- 2 x 1/2" air vent
- 3 x 1/2" blind cap
- Kit of 4 brackets

Special Versions

- Mirò 10 vertical electric: available in the Electric towel warmers section
- Electrification kit (for mixed use): not available
- Chromed product: not available
- Coloured version: available
- One-pipe system (see Technical Info pages): yes
- Central connection: available, with 1/2" connections and tappings centre 50mm, internal thread (see code change)
- Side connections: supplied as standard
- Room divider fixing kit: not available
- Valve and lockshield-valve are to be ordered separately

Spare parts

Brackets

XTB brackets
included

Spare part code 99AT0095 white

Spare part code 550S002100 chromed

