

Ø 22 — P 36

Height H (mm)	Length L (mm)	Tappings centre I (mm)	Width	Num. of tubes	Power Δt 50°C 75/65-20	Power Δt 40°C 70/50-20	Power Δt 30°C 55/45-20	Exp. n	Empty weight (kg)	Water content (l)
600	572	550	56	16	470	355	247	1,258	8,2	3,8
600	860	550	56	24	706	533	371	1,258	12,2	5,8
600	1076	550	56	30	882	666	464	1,258	15,3	7,2
600	1292	550	56	36	1058	799	556	1,258	18,4	8,6
1800	284	1750	56	8	638	482	335	1,260	10,2	4,9
1800	428	1750	56	12	958	723	503	1,260	15,4	7,3
1800	572	1750	56	16	1277	964	671	1,260	20,5	9,8

— TECHNICAL SPECIFICATIONS —

Technical characteristics


- Pipes diameter 22 mm
- Pipes distance 36 mm
- Round collectors 38 mm
- Max working pressure = 10 bar
- Test pressure = 13 bar
- Max working temperature = 110°C

Included in the packing


- 4 x 1/2" connections, internal thread (two bottom connections, two top connections)
- 1/2" air vent, included in the package
- 1/2" blind cap, included in the package
- 4 brackets included in the package

Special Versions

- Monocolonna electric: not available
- Electrification kit (for mixed use): not available
- Chromed product: not available
- Coloured version: coloured versions can be ordered by modifying the order code (for the available colours, see the colour card)
- One-pipe system (see Technical Info pages): yes
- Central connection: not available
- Side connections: supplied as standard
- Room divider fixing kit: not available
- Valve and lockshield-valve are to be ordered separately

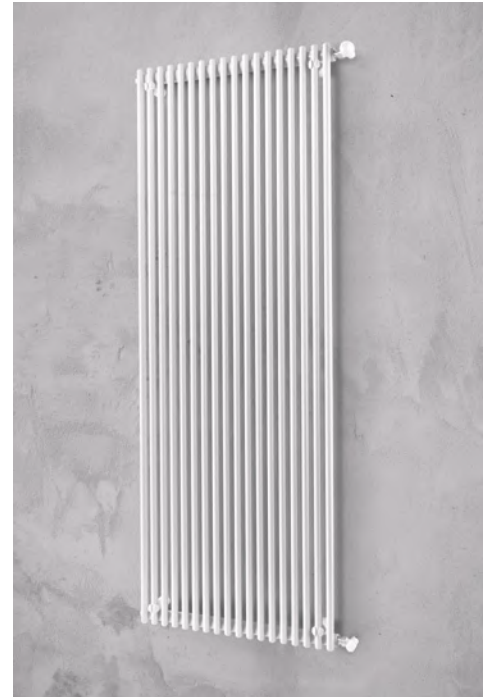

— OPTIONAL —

Connection accessories

**Ovus Chrome Valve
and Lockshield valve**
1/2" x 24/19



Thermostatic Heads
for Ovus Kit
(M30x1,5)



**Ovus White Kit
and Lockshield valve**
1/2" x 24/19



Thermostatic Heads
for Ovus Kit
(M30x1,5)

