

Code	Height H (mm)	Length L (mm)	Width (mm)	N. tubes	Power W	Weight (kg)
------	---------------	---------------	------------	----------	---------	-------------

white or coloured without plug

OPDRTRx511155H5	1190	550	49	12	500	20,6
OPDRTRx511455H7	1515	550	49	15	700	26,5
OPDRTRx511755H1	1840	550	49	18	1000	31,5

x = 0 : white / x = 9 : coloured / x = 3 : anthracite

The electric output is equal to the thermal output at operating mode.

Features

Technical characteristics

- Flat tubes dimension 70x11 mm
- Pipes distance 7 mm
- Round collectors 38 mm
- Mains electricity supply: 230 V AC, 50Hz
- Class 2, IP 34
- For NF certification, see www.lcie.fr

Standard equipment

- Kit of 4 brackets

Electric installation

- The radiator must be installed outside zone 1 (bathroom)
- The switch/electronic control must be in zone 3 (bathroom)
- For safety reasons, the radiator must not be installed beneath a mains socket
- Turning a towel warmer by 180° is not possible
- Every towel warmer has to be installed frontally, and the thermostat has to lie on the lower-right position

Special version

- Agata Linea hot water: available
- Chromed version: not available
- Coloured version: available

Functions



Electronic thermostat with digital temperature regulation. The towel warmer has five functions:

- **Comfort mode:** the chosen temperature is regulated by the remote control
- **Night mode:** the electric towel warmer is regulated at 2°C below comfort temperature
- **Pilot wire mode:** the electric towel warmer can be adjusted remotely through a central electric radiator regulation system (mode available only in homes fitted with such a system)
- **Timer mode:** using the remote control, the on and off times of the towel warmer can be programmed hour by hour for the seven days of the week
- **Two hour override function:** when this function is activated, the radiator operates at maximum power for two hours to heat the room rapidly.
- **Freeze prevention function:** when the dial is on minimum, the towel warmer comes on automatically when room temperature drops below 7°C.




Remote control included

NEW colours

COLOUR SCHEME

PRODUCT	THERMOSTAT	REMOTE CONTROL	BRACKETS
white	white	white	white
coloured	chromed	anthracite	anthracite
anthracite	anthracite	anthracite	anthracite

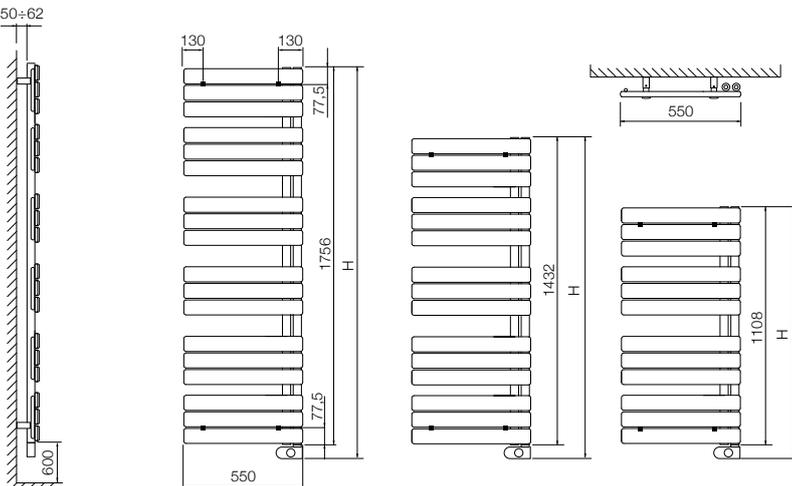

Spare parts

Brackets



XTB brackets included

Spare part code 550S004400 white
 Spare part code 550S006800 anthracite

Remote control



included
 Spare part code 5525010712 white
 Spare part code 5525010722 anthracite

The exact order of the tubes and of the "openings" between the tubes themselves is that one showed in the technical drawings above; the picture in the page aside can sometimes be only approximate (regarding tubes and of the "openings" between the tubes themselves)