

D 70x11 — P 7

Code	Height H (mm)	Length L (mm)	Tappings centre I (mm)	Width	Num. of tubes	Output Δt 50°C 75/65-20 (W)	Output Δt 40°C 70/50-20 (W)	Output Δt 30°C 55/45-20 (W)	Exp. n	Empty weight (kg)	Water content (l)	Electric resistance Class 1 (W) *	Electric resistance Class 2 (W) *
OPDRPMx63075000	774	500	450	49	8	383	294	208	1,192	9,5	3,5	400	400
OPDRPMx63076000	774	600	550	49	8	449	344	244	1,192	10,9	3,7	400	500
OPDRPMx63115000	1097	500	450	49	11	524	401	283	1,203	12,9	5,1	700	500
OPDRPMx63116000	1097	600	550	49	11	610	466	330	1,204	15,0	5,6	700	750
OPDRPMx63135000	1328	500	450	49	14	629	479	338	1,218	16,3	6,2	700	750
OPDRPMx63136000	1328	600	550	49	14	731	557	393	1,215	19,0	6,8	1000	1000
OPDRPMx63165000	1636	500	450	49	17	777	590	413	1,237	20,1	7,9	1000	1000
OPDRPMx63166000	1636	600	550	49	17	902	685	481	1,231	23,3	8,6	1000	1000
OPDRPMx63167500	1636	750	700	49	17	1090	830	584	1,220	28,4	9,8	1500	1500

x = 0 : white / x = 9 : coloured

*max electric heating element power suitable for this size

Features

Technical characteristics

- Flat tubes 70x11 mm
- Round collectors Ø38 mm
- Tubes distance 7 mm
- Max working pressure = 4 bar
- Test pressure = 6 bar
- Max working temperature = 110°C
- For NF certification, see www.certita.fr

Standard equipment

- 3 x 1/2" connections, internal thread (two bottom connections, one top connections)
- 1/2" air vent and 1/2" blind cap
- Kit of 4 brackets


Special Versions

- Cobalto Linea electric: not available
- Electrification kit (for mixed use) available on request: kit with ON/OFF switch (class 1) and Schuko plug; kit with analogue (class 2) or digital (class 2) room thermostat and remote control unit (a kit with heating element only is also available) - the maximum outputs of the kit for each size are given in the table on the facing page
- Chromed product: not available
- Coloured version: available
- One-pipe system (see Technical Info pages): yes
- Central connection: not available
- Side connections: not available
- Room divider fixing kit: not available
- Valve and lockshield-valve are to be ordered separately

NEW
hidden
brackets
-included-NEW
colours

COLOUR SCHEME

PRODUCT	BRACKETS
white	white
coloured	coloured

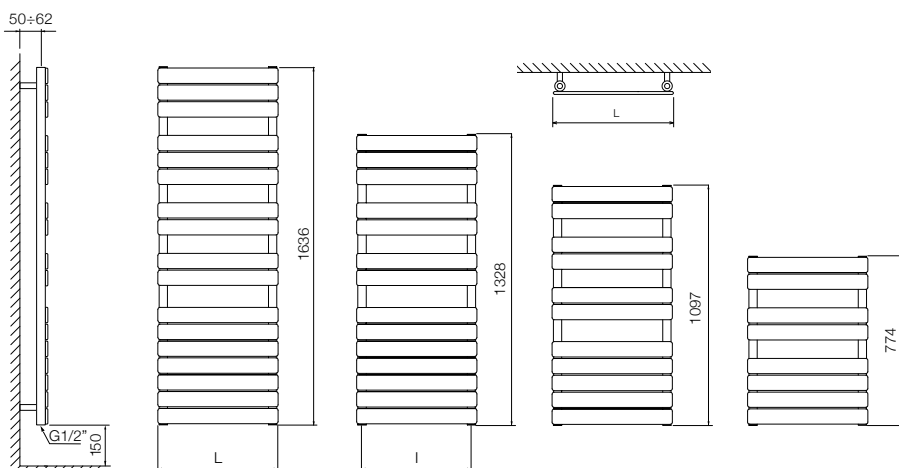

Spare parts

Hidden brackets

included

Spare part code 550S015600

white

Spare part code 550S015700

coloured

The exact order of the tubes and of the "openings" between the tubes themselves is that one showed in the technical drawings above; the picture in the page aside can sometimes be only approximate (regarding tubes and of the "openings" between the tubes themselves)